


# WIT 50-100kW Hybrid Inverter

(WIT 50-100K-H, WIT 50-100K-HU)

- Scalable system configuration, extend to 300kW
- Support UPS function and black start
- 100% unbalanced load when backup
- 110% continuous AC overloading capacity
- Support remote control of DG
- Multiple MPPTs input
- Grid-support functions

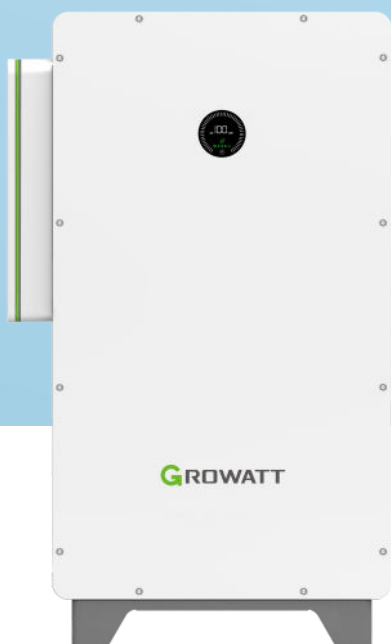

Preliminary Version

P O W E R  
- I N G O  
T O M O -  
R R O W O

**G**ROWATT

[www.ginverter.com](http://www.ginverter.com)

Datasheet	WIT 50K-H WIT 50K-HU	WIT 63K-H WIT 63K-HU	WIT 75K-H WIT 75K-HU	WIT 100K-H WIT 100K-HU
<b>Input Data (PV)</b>				
Max. recommended PV power(for module STC)	109.2kW	124.8kW	156kW	156kW
Start voltage			195V	
Nominal voltage			550V	
Max. Input Voltage			1100V	
MPP voltage range			180V-800V	
Max. input current per MPP tracker			32A	
Max. short-circuit current per MPP tracker			40A	
No. of PV strings per MPP tracker			2	
No. of MPP trackers	7	8	10	10
<b>Output Data (AC)</b>				
AC nominal power	50kW	63kW	75kW	100kW
Max. AC apparent power	55KVA	69.3KVA	82.5KVA	110KVA
Nominal AC voltage			380/400/415V	
AC voltage range			-15%~+10%	
AC grid frequency			50/60 Hz	
AC grid frequency/range			45-55Hz/55-65Hz	
Max. output current	83.3A@380V 79.7A@400V	105A@380V 100.4A@400V	125A@380V 119.6A@400V	166.7@380V 159.4A@400V
Adjustable power factor			-1...+1	
THDI			<3%	
AC grid connection type			3P3W+PE/3P4W+PE	
<b>Battery Data (DC)</b>				
Continuous charging and discharging power	56.7KW	71.4KW	85.1KW	113.5KW
Battery voltage range			600-1000V (for 3P3W) / 680-1000V (for 3P4W)	
Recommended battery voltage			768V	
Max charging and discharging current	83.3A	105A	125A	167A
BMS communication			RS485/CAN	
<b>Backup Power (AC)*</b>				
Rated AC output power	50KW	63KW	75KW	100KW
Max. AC apparent power	60KVA	75.6KVA	90KVA	120KVA
Rated AC output voltage			220V/230V/240V(L-N) 380V/400V/415V(L-L)	
Nominal AC output frequency			50/60 Hz	
Load connection			3W+N+PE	
Max. output current	90.9A	114.5A	136.4A	181.8A
THDv			<3% (Linear load)	
Load unbalance			100% three-phase unbalanced	
Overload capacity			≤110%: Continues; 110%~120%: <1min; >120%: 200ms	
On/off grid transfer time			20ms	
<b>Efficiency</b>				
Max. efficiency			98.2%	
<b>Protection Devices</b>				
PV reverse polarity protection			Yes	
Battery reverse protection			Yes	
AC/DC surge protection			Type II	
Insulation resistance monitoring			Yes	
Ground fault monitoring			Yes	
Grid monitoring			Yes	
Residual-current monitoring unit			Yes	
AC short-circuit protection			Yes	
Strings monitoring			Yes	
Anti-islanding protection			Yes	
PID protection			Yes	
AFCI function			Opt	
<b>General</b>				
Dimensions (W / H / D)			820/1350/510mm	
Weight	153kg	153kg	160kg	160kg
Operating temperature range			-30 °C~60 °C (> 50°C, derating)	
Relative humidity			0~100%	
Altitude			4000m	
Topology			Transformerless	
Cooling			Smart air cooling	
IP degree			IP66	
Display			OLED+LED/APP	
Interfaces: RS485/CAN/USB			Yes	
Interfaces: WiFi/4G/LAN-X			Opt	
Warranty (5/10 years)			Yes/Opt	

EN 62920-2017, IEC/EN62477-1, IEC/EN62109-1, IEC/EN62109-2, IEC62116, IEC61727, G99:2020, EN50549-1, VDE 4105, VDE 0124, NRS 097-2-1

\* The parameter of backup power is only available for WIT 50-100K-HU model.

\* 2023 SHENZHEN GROWATT NEW ENERGY CO.,LTD All rights reserved. Subject to change without notice.